





CATALOGUE 2020-2021

TEP PLUS

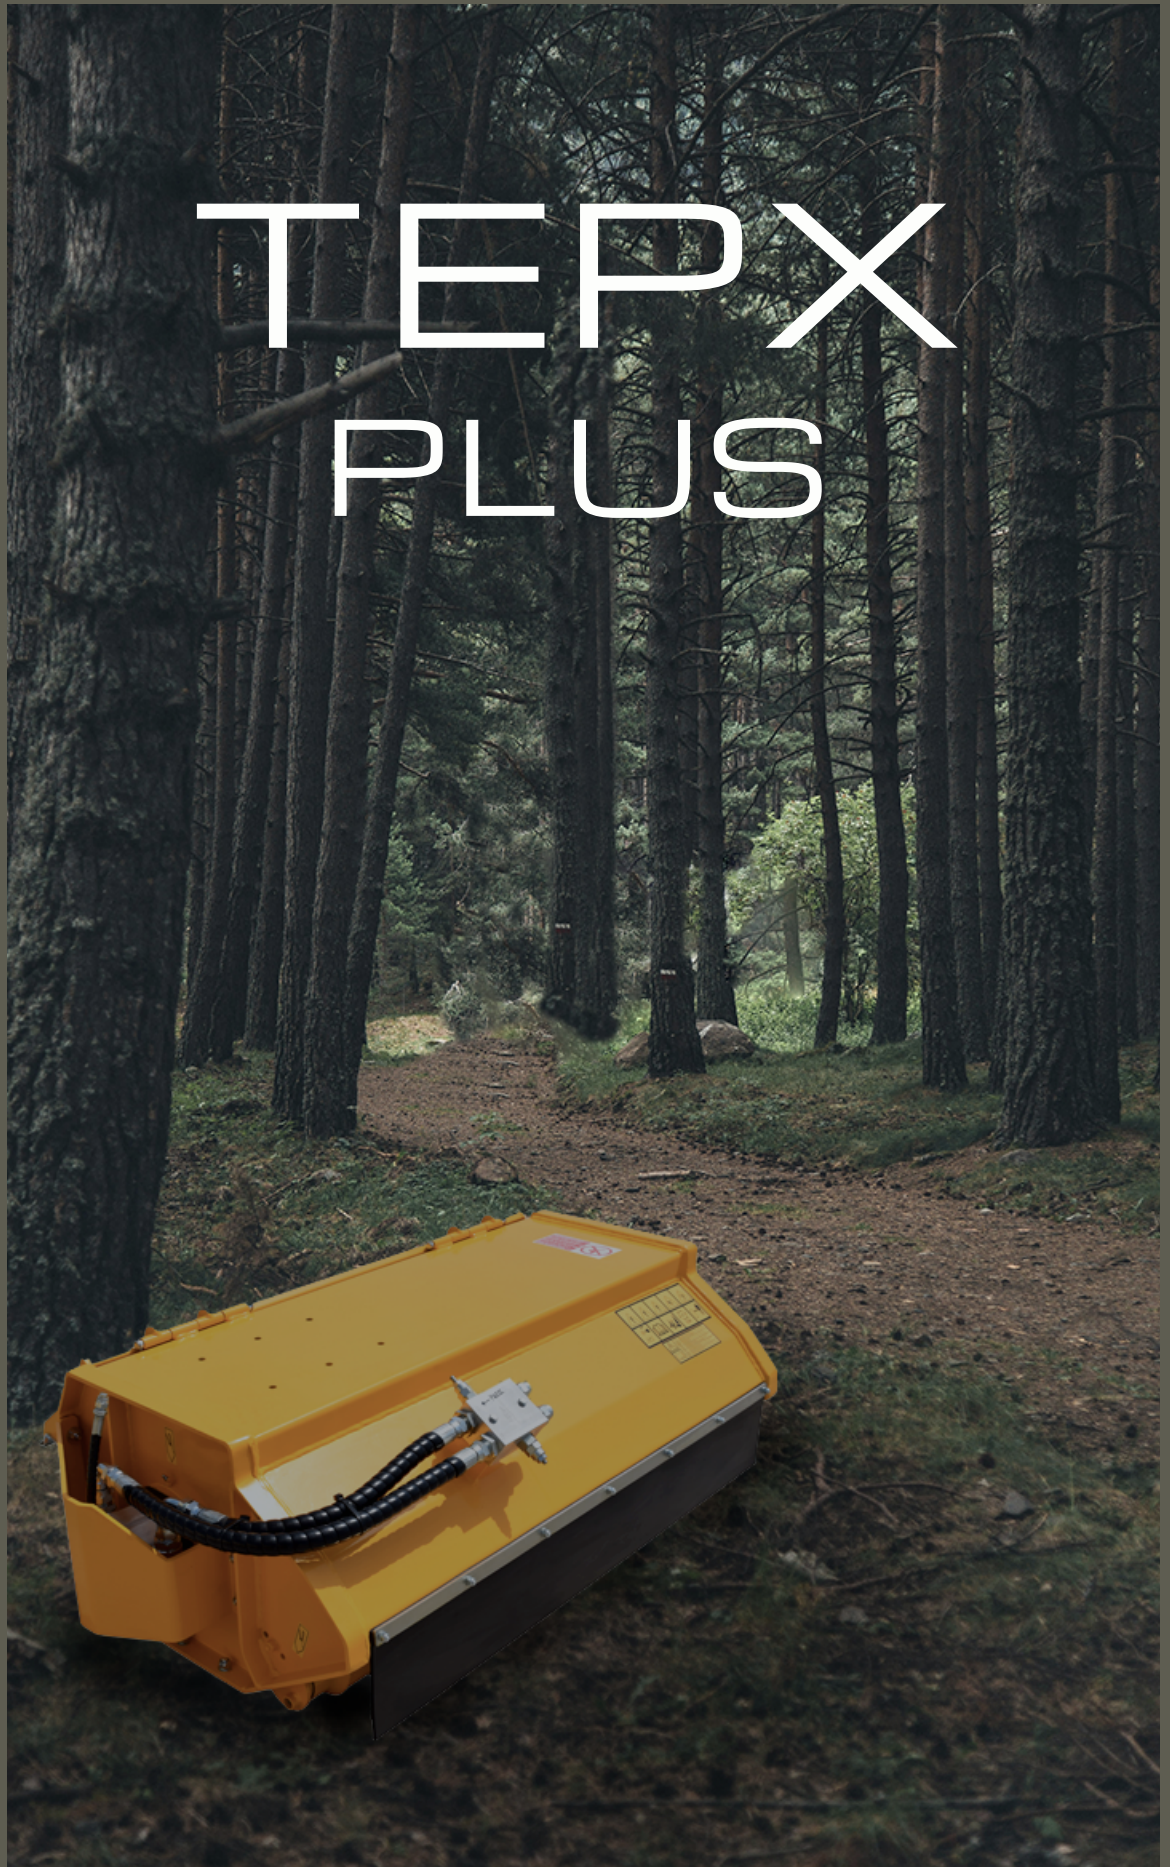


Suitable for excavators from 6 to 10 tons, to shred grass and small bushes up to 6-8 cm of diameter

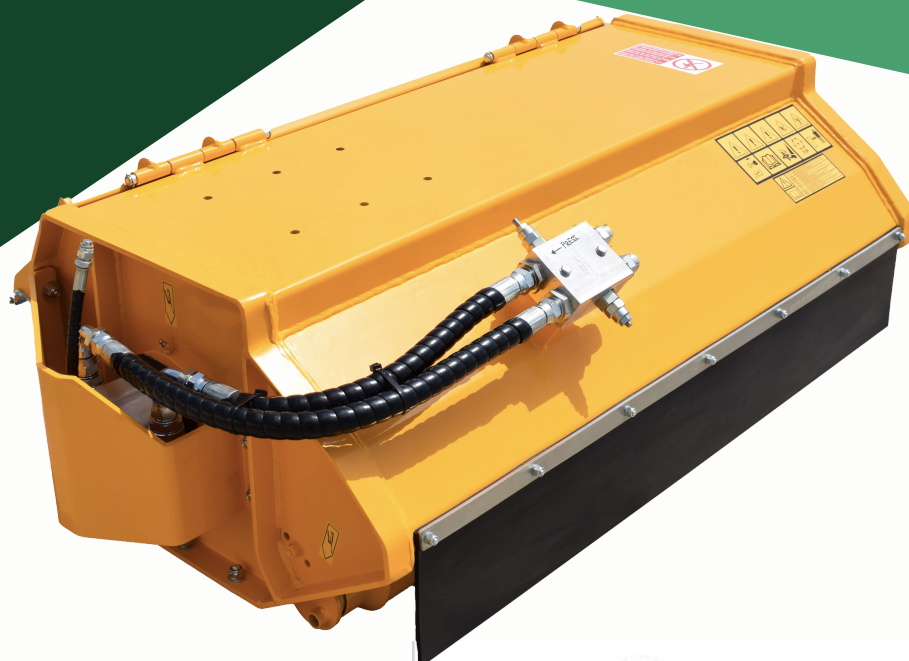

TEPX 125

A 1260
B 1520
C 860
D 510

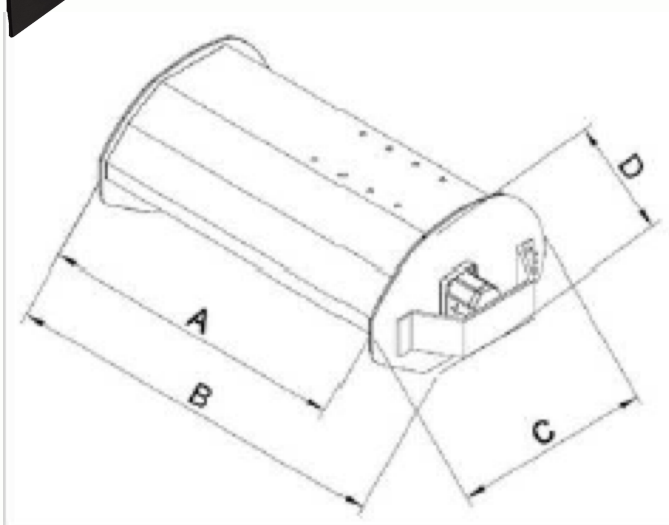

MODEL					
	m	m	Kg	L/min	Bar
TEPX 125 PLUS	1,26	1,52	300	95-130	180-190

N.B. The total weight of the machine is get summing, the weight of the machine, the weight of the self-leveling support and the weight of the high plate.

EQUIPMENT

	125
DOUBLE FRAME	•
REAR ADJUSTABLE ROLLER	•
HELICOIDAL ROTOR	•
MOTOR PROTECTIVE CASING	•
GEAR HYDRAULIC MOTOR WITH DRAINAGE	•
CALIBRATED MAXIMUM PRESSURE VALVE	•
CONNECTION HYDRAULIC HOSES WITH PROTECTIVE SHEATH L = 160 cm	•
ROUGH FIXING COUNTER-PLATE	•
Rotor cod. 7003	•
CAST IRON ENGINE WITHOUT DRAINAGE	OPTION
SELF-LEVELING SUPPORT	OPTION
TAILORED MADE COUPLING PLATE	OPTION
BELTS DRIVE	OPTION
Rotor cod. 7004	OPTION
Rotor cod. 7012	OPTION
Rotor cod. 7016	OPTION
Rotor cod. 7017	OPTION
• STANDARD	

**STANDARD
COD. 7003**
Ø: 400 mm
TEPX 125 PLUS
n° 40+20




COD. 7004
Ø: 425 mm
TEPX 125 PLUS
n° 32+16



COD. 7012
Ø: 380 mm
TEPX 125
n° 14



COD. 7016
Ø: 400 mm
TEPX 125 PLUS
n° 22

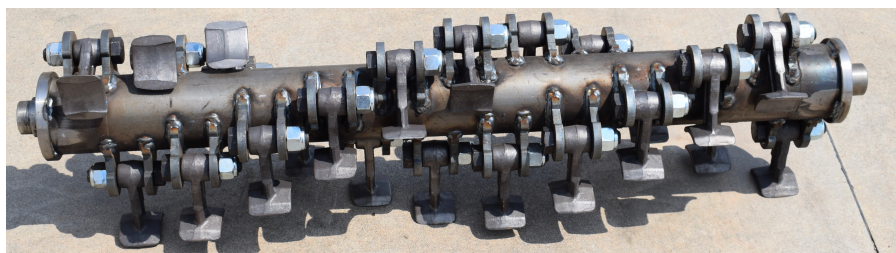

COD. 7017
Ø: 420 mm
TEPX 125 PLUS
n° 22

