



60 ÷ 160 HP

BACK-HOES

Series
65-29

Technical characteristics and Standard equipment

Working depth : 2900 mm

Central rotation of 180° by two jacks

Chassis width : 1800 mm

Structure of stainless steel

Weight : 830 kg

Monobloc control with levers : 66L

Chassis with 3-point hitch (translating with hydraulic locking TI)

Multiplier / Pump : GR2 26L

Hydraulic reservoir : 55L

Monobloc control with levers with anti shock and anti cavitation valve : 60L

In-dependent hydraulic stabilizers equipped with check valves


Bucket : 400 mm

Tractor fixing chains

Hardened bushings and pins on each joint

Hydraulic jacks equipped with C.45. rods

Sanding / polyester dust paint-ing -

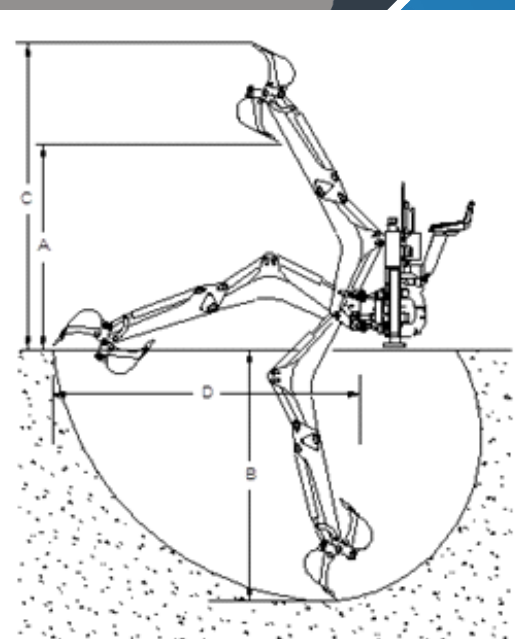

ACCESSORIES

		65-29
A	cm	225
B	cm	290
C	cm	320
D	cm	365
Weight	kg	830
Width chassis	cm	180
Break force	kg	6.700
Bucket	cm	40
For tractors with power	Hp	60÷160
P.T.O.	g/min	540

HEAVY DUTY BUCKET

300 mm	500 mm
400 mm	600 mm

DITCH CLEANING BUCKET

800 mm	1000 mm	1200 mm
--------	---------	---------

TRAPEZOIDAL BUCKET




200 x 600 mm	250 x 800 mm
--------------	--------------

BREAKER (*)

90 kg

Breaker with adapter (plate) equipped with silent box

(*) : accessory with additional hydraulic system



All hydraulic components are MADE IN ITALY